


LED T5 / T8 Surface Mounted Batten Light with Emergency & Microwave Motion Sensor

CELEXLED




LED T5 / T8 Surface Mounted Batten Light with Emergency & Microwave Motion Sensor

Product Dimensions:

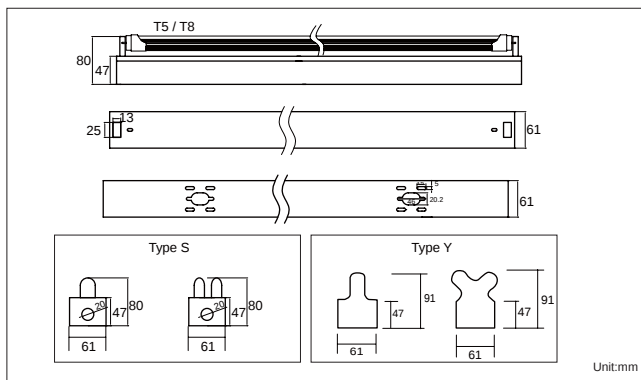

Luminous Intensity Distribution Diagram & Lux Distribution:

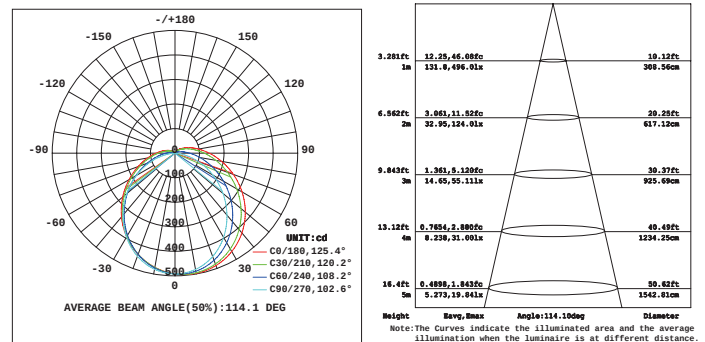

LED T5 / T8 Surface Mounted Batten Light with Emergency & Microwave Motion Sensor

CELEXLED

Features:

- Wall-mounted & Ceiling-mounted
- Polycarbonate cover for uniform illumination
- High power factor and power efficiency design
- Fuse terminal design for short circuit protection
- Built-in constant current power supply
- Optional emergency duration>3hours
- Optional Microwave Motion Sensor

Applications:

- Subway Lighting
- Stairway Lighting
- Corridor Lighting



LED T5 / T8 Surface Mounted Batten Light
with Emergency & Microwave Motion Sensor

LED T5 / T8 Specifications:

Tube Type	T5 / T8
Beam Angle	120°
Color Rendering Index	80
Luminaire Efficacy	2700K 100LM/W, 3000K 105LM/W, 4000K 110LM/W ,6500K 120LM/W
IP Rate	IP20
Housing Materials	Aluminum and Polycarbonate

Emergency Specifications:

Emergency Battery System P/N: CEEB09W-60MA

Power Factor (No Emergency LED Light Module)	0.95
Light Source	SMD 2835
Recharge Time	<12 Hours
Discharge Time	>2,3,4 Hours Adjustable
Discharge Protection	Electronic Protection
Input Voltage	AC 176~264V or 100~120V (50/60Hz)
Battery	9.6V 2.2AH/Ni-MH Rechargeable Battery
Emergency Output Power	10%~100% Adjustable
Emergency Lumen Output	10%~100% Adjustable
Transfer Time	<3.0 Second
Test Button	In AC mode, push and hold the button to test the emergency mode, release to normal
Operating Temperature	-20~ 50°C
Housing Materials	Polycarbonate Cover
Humidity	0~95%(IP65)
Net Weight	3.8kg


Microwave Sensor Specification:

IP Rating	IP20(installed inside luminaire)
Input	DC 12V
Power	<1W
Transmission	<10mW
High-Frequency Detector System	5.8 GHz Continuous Wave Radar ISM Band
Detection Angle	360°
Detection Distance	Up to 8m
Motion Detection Range	1 km/h to 10 km/h
Time Setting	10 Sec to 5 Min
Lux Control	2~2000 Lux Adjustable
Lumen Output Control	0~100% Adjustable

LED T5 / T8 Surface Mounted Batten Light with Emergency & Microwave Motion Sensor

CELEXLED


Ordering Part No.:

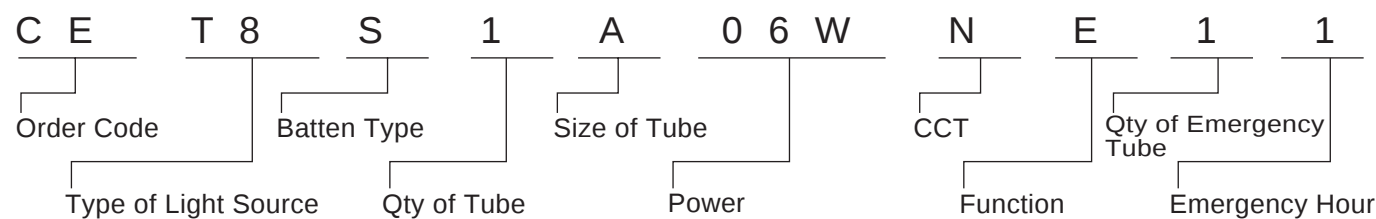

Order Code	Type of Light Source	Batten Type	Qty of Tube	Size of Tube	Power	CCT	Function	Qty of Emergency Tube	Emergency Hour
CE	T5 T8	S Y	1 2	A:2ft B:3ft C:4ft D:5ft	06W 22W	O:2700K	E:Emergency	0	0
					07W 24W	W:3000K	S:Microwave	1	1
					08W 26W	N:4000K	Motion Sensor	2	2
					09W 28W	C:6500K	M:Emergency and		3
					10W 30W		Microwave Motion		4
					11W 32W		Sensor		5
					12W 34W		N:Switching On / Off		
					13W 36W				
					14W 38W				
					15W 40W				
					16W 42W				
					18W 44W				
					20W				

Accessories:

- Prismatic Diffuser

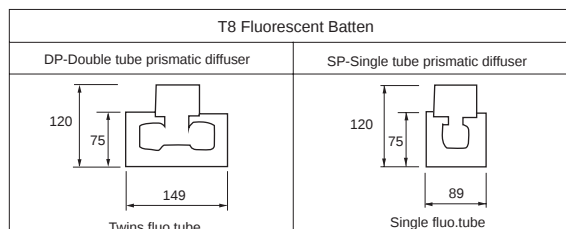

- Wire Guard

