



CELEXLED


LED Water Proof Batten Light GALAXY Series

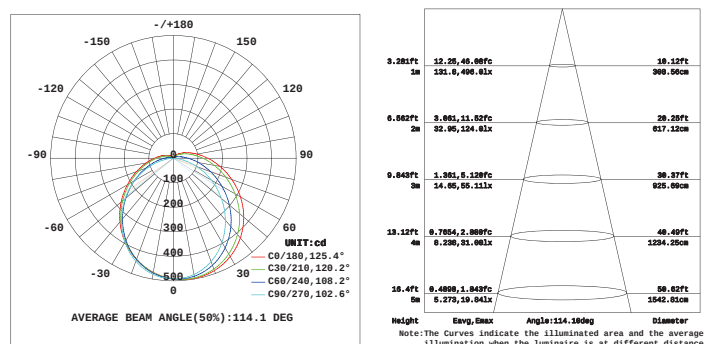

Luminous Intensity Distribution Diagram & Lux Distribution:

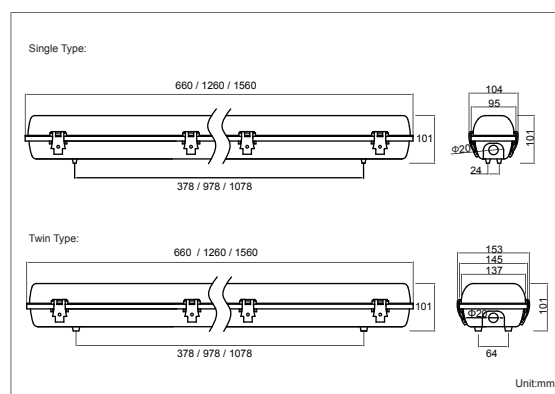

Microwave Motion Sensor Function on Corridor

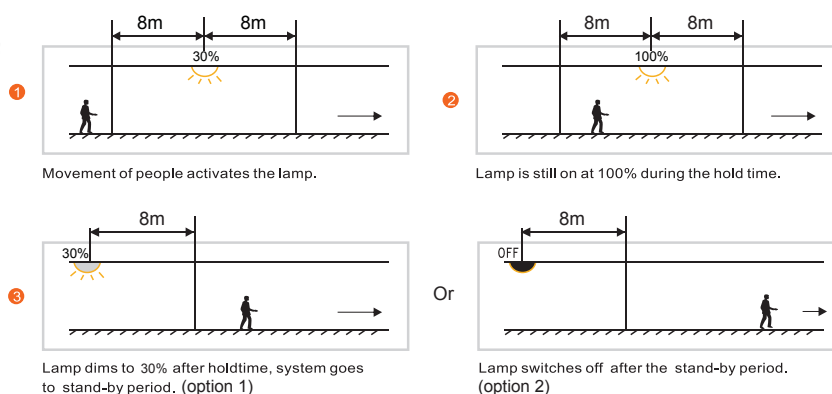

Emergency Standard:

- IEC 62031
 - IEC 60838-2-2
- RoHS Standard:**
- EPA3050B
 - EN 1122
 - IEC 62321
 - EPA3052
 - EPA3060A
 - EPA7196A
 - EPA3540C
 - EPA8270C
- LED Luminaire Performance:**
- LM-80-08
 - Switching cycle:100,000x
- LED Light Photometric Standard:**
- CIE: TM14; LM-75; IES: LDT; CEN: CIB

- With CELEX-LED Emergency System
- HKFSD PPA 104A(4th Revision)
- EN 60598-2-22
- BS 6387
- BS EN 60598-2-22
- EN 61347-2-7
- BS EN 60702-2
- BS 5266-1
- BS 6207-3

LED Water Proof Batten Light GALAXY Series with Emergency & Microwave Motion Sensor

CELEXLED

Features:

- Wall-mounted & Ceiling-mounted
- Polycarbonate cover for uniform illumination
- High power factor and power efficiency design
- Fuse terminal design for short circuit protection
- Built-in constant current power supply
- Optional emergency duration>3 hours
- Optional microwave motion sensor

Applications:

- Subway Lighting
- Stairway Lighting
- Corridor Lighting



LED Water Proof Batten Light
GALAXY Series

LED T5 / T8 Specifications:

Tube Type	T5 / T8
Beam Angle	120°
Color Rendering Index	80
Luminaire Efficacy	2700K 100LM/W ,3000K 105LM/W ,4000K 110LM/W ,6500K 120LM/W
IP Rate	IP20
Housing Materials	Aluminum and Polycarbonate

Emergency Specifications:

Emergency Battery System P/N: CEEB09W-60MA

Power Factor (No Emergency LED Light Module)	0.95
Light Source	SMD 2835
Recharge Time	<12 Hours
Discharge Time	>2,3,4 Hours Adjustable
Discharge Protection	Electronic Protection
Input Voltage	AC 220~240V or 100~120V (50/60Hz)
Battery	9.6V 2.2AH/Ni-MH Rechargeable Battery
Emergency Output Power	10%~100% Adjustable
Emergency Lumen Output	10%~100% Adjustable
Transfer Time	<3.0 Seconds
Test Button	In AC mode, push and hold the button to test the emergency mode, release to normal
Operating Temperature	-20~ 50°C
Housing Materials	Polycarbonate Cover
Operating Humidity	0~95%(IP65)
Net Weight	3.8kg


Microwave Sensor Specifications:

IP Rating	IP20(installed inside luminaire)
Input	DC 12V
Power	<1W
Transmission	<10mW
High-Frequency Detector System	5.8 GHz Continuous Wave Radar ISM Band
Detection Angle	360°
Detection Distance	Up to 8m
Motion Detection Range	1 km/h to 10 km/h
Time Setting	10 Sec to 5 Min
Lux Control	2~2000 Lux Adjustable
Lumen Output Control	0~100% Adjustable

LED Water Proof Batten Light GALAXY Series with Emergency & Microwave Motion Sensor

CELEXLED

Ordering Part No.:

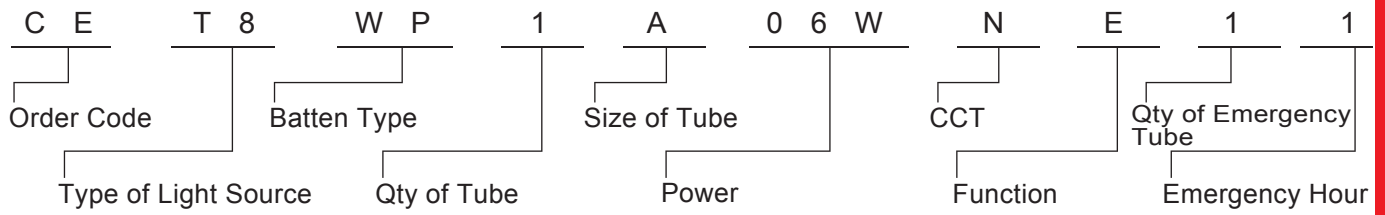

LED Water Proof Batten Light
GALAXY Series

Order Code	Type of Light Source	Batten Type	Qty of Tube	Size of Tube	Power	CCT	Function	Qty of Emergency Tube	Emergency Hour
CE	T5 T8	WP	1 2	A:2ft C:4ft D:5ft	06W 24W	W:3000K	E:Emergency	0	0
					07W 26W	N:4000K	S:Microwave	1	1
					08W 28W	C:6500K	Motion Sensor	2	2
					09W 30W		M:Emergency and		3
					10W 32W		Microwave Motion		4
					12W 34W		Sensor		5
					13W 36W		N:Switching On / Off		
					14W 38W				
					16W 40W				
					18W 42W				
					20W 44W				
					22W				